

The mobile thermal transfer printer

051790



The Monarch® Sierra Sport 4™ 9493™

- Hybrid: - Portable or small tabletop printer
- Thermal direct AND thermal transfer in one printer
- Flexible power sources (AC, DC, battery, forklift truck power with automatic shifting) to decrease downtime
- Secure wireless connectivity
- Fast on-demand printing
- Rugged case: impact resistant, designed for warehouse/distribution centres and outdoor operations
- Perfect for mobile logistic applications e.g. forklifts

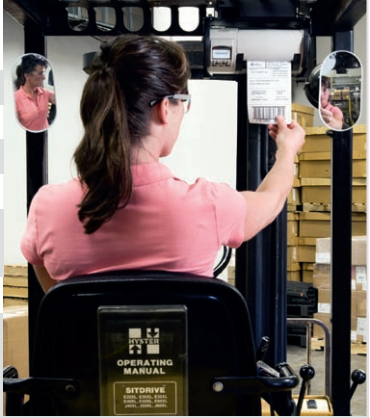


**AVERY
DENNISON**

Monarch®
Products and Services

Monarch® Sierra Sport 4™ at a glance

Standard Features Monarch® Sierra Sport 4™ 9493™

Dimensions (W x H x D):	254 mm x 203 mm x 117 mm Weight - 2.0 kg (including battery and supply roll)	
Printing methods:	Thermal transfer; thermal direct	
Maximum print area:	108 mm x 305 mm	
Printhead:	108 mm, 203 dpi	
Operator interface:	On/Off, and four context-sensitive keys	
Display:	Multi-line graphical LCD with backlight and adjustable contrast, Display orientation is rotatable 180° via software selection	
Memory:	32 MB SDRAM, 32 MB Flash	
Barcode types:	UPCA +2/+5, UPCE +2/+5, EAN8 +2/+5, EAN13 +2/+5, Code 16k, Interleaved 2 of 5, Codabar (NW7), Code 128, Code 39, MSI, PDF417, Code 93, Postnet, Maxicode QR Code, GS1 databar and Datamatrix	
Standard fonts:	42 fonts including Standard, Reduced, Bold, EFF Swiss Bold*, OCRA-like, HR1 and HR2 (HR1 and HR2 are only for numeric data), downloadable and scalable fonts	
Font magnification:	1 x to 7 x for Bitmapped fonts, 4 to 250 pt. for scalable fonts	
Wireless communications:	IEEE 802.11b/g with data rates up to 54 Mbps.	
Wireless data security:	Full WPA2 / IEEE 802.11i wireless encryption and authentication	
Remote device management:	Integrated web browser interface, integrated wavelink® Avalanche support	
Accessories:	Shoulder strap, hand strap, vehicle mount with or without power supply, Bluetooth®	

* Also available as a scalable font. The printer supports Bitmapped, TrueType® and international fonts

Consumables

Supply types:	Tags, labels and receipt paper
Supply sizes:	Width: 51 mm to 118 mm; Length: 14 mm to 305 mm Supply roll lengths: 25.8 meters linerless; 18.4 meters standard
Supply thickness:	Tags up to 0.18 mm; Labels up to 0.17 mm; Receipt paper up to 0.06 mm
Ribbon specifications:	Length: 51 meter as standard External roll diameter: 28 mm External core diameter: 12.25 mm - 13.25 mm Internal core diameter: 9.75 mm - 10.15 mm

Environment Ranges

Operating temperature:	5 to 40 °C
Storage:	-20 to 50 °C
Humidity/operating and storage:	5 % to 90 % non-condensing

Performance

Power source:	Monarch® 14.8 V Li-ion battery pack
Print speed:	Up to 101 mm/s

You're never far from an
Avery Dennison representative:

Benelux
Denmark / Scandinavia
France

Germany
Iberia
India

Italy
Poland
PR China / Hong Kong

Turkey
UAE
USA

Avery Dennison Retail Information Services UK Ltd.
7 Astra Centre
Harlow, Essex CM20 2BN
Phone: +44 (0) 1279 786 000
Fax: +44 (0) 1279 786 100
printers.uk@eu.averydennison.com
www.machines.averydennison.com

